

BARCO PUMP

BRL6R

6" X 6"

PUMP SPECIFICATIONS

Type/Model: 6" LobePro Rotary Pump, SL133

Pump: Class 30 Gray Cast-Iron Casing & Smooth End Cover

Solids: Handles 1.5" Compressible Solids

Rated Capacity: 0 - 665 GPM

Displacement: 100 US Gallons/ 100 Revolutions

Working Pressure: 75 PSI Max

Flange Connections: Included

Rated Speed: 0 - 500 RPM


Rotors in: Helix 4-Wing Rotors

Wet-Ends: Standard Grey Cast Iron

Shaft Material: Alloy Steel, AISI 4140

Gear Material: AGMA Class 9, SAE 1045

Approx. Weight: 305 lbs. (138.3 kg)

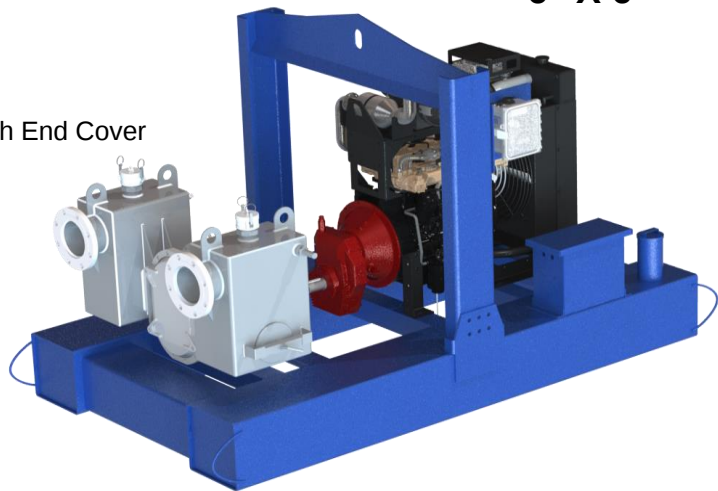

***Shown with options

ENGINE SPECIFICATIONS

Manufacturer: Rehlko (Kohler)

Type: 4 Cylinder, Final Tier 4, Diesel Engine

Cooling: Liquid- Cooled

Performance: 56 HP @ 2400 RPM

Displacement: 1.8 Liters or 109.843 in³

Starter: 12V Electric

Fuel Tank: 100 U.S. Gallons

Full Load Operating Time: 50 Hours

FEATURES:

Standard Equipment: Lifting Bale, 12 Volt Battery, Steel Battery Box, Exhaust Rain Cap, Lockable Fuel Cap, Engine Control Panel, Twin Disc Gearbox (3.75:1 Ratio)

Optional Equipment: Standard Wheel Kit or DOT Wheel Kit, Hardened Wear Parts, Automatic Liquid Level Control Panel

Multiple Fitting Options - Please Ask Your Representative

